

**INDiART**

CERAMIC



**200 X 1200 MM**

# THE FINEST WOODWORK FOR THE FINEST LIVING.

Experience the calmness and elegance  
of nature from the comfort of your own home.  
Discover the strength, textures, and tones  
that wood has to offer. The collection of  
200x1200mm tiles is everything different  
you were looking for.

**2 0 0 X**

**1 2 0 0 M M**



WOODS ARE  
FLOORING  
ARE WOODS.  
WOODS ARE  
FLOORING  
ARE WOODS.  
WOODS ARE  
FLOORING  
ARE WOODS.



FIND  
CREATIVITY  
FROM BASICS.



GRIS

SAND



# NAUNCE GRIS

200X  
1200MM

RANDOM  
14



# NAUNCE GRIS

200X  
1200MM

RANDOM  
14





# NAUNCE SAND

200X  
1200MM

RANDOM  
14



# NAUNCE SAND


200X  
1200MM

RANDOM  
14





## LAYING SOLUTIONS

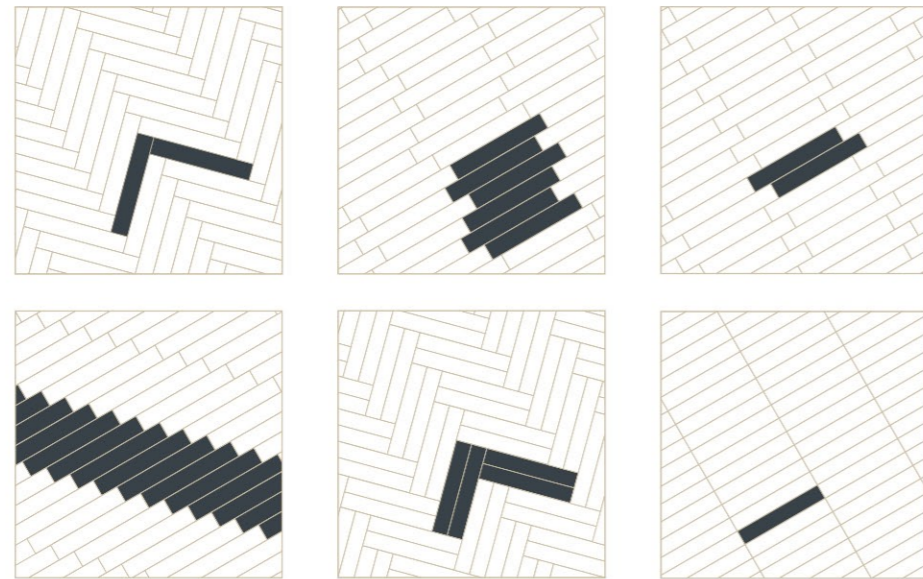


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

## PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	$\pm 0,3\%$ , max 1 mm	In According	
		Thickness	$\pm 5\%$ , max 0,5 mm	In According	
		Wedging	$\pm 0,3\%$ , max 1,5 mm	In According	
		Straightness of the edges	$\pm 0,3\%$ , max 0,8 mm	In According	
		Flatness	$\pm 0,4\%$ , max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	$\leq 0,5\%$	In According	
		Breaking strength	$S \geq 1300$ N	$S \geq 2000$ N	
		Modulus of rupture	$R \geq 35$ N/mm <sup>2</sup>	In According	
		Resistance to surface abrasion	According to classification indicator by manufacture	PEI IV	
THERMAL SHOCK		Coefficient of thermal linear expansion	$9 \times 10^{-6}$ max	In According	
		Thermal shock resistance	Resistant	Resistant	
		Resistance to frost	Resistant	Resistant	
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



## INSTALLATION ADVICE

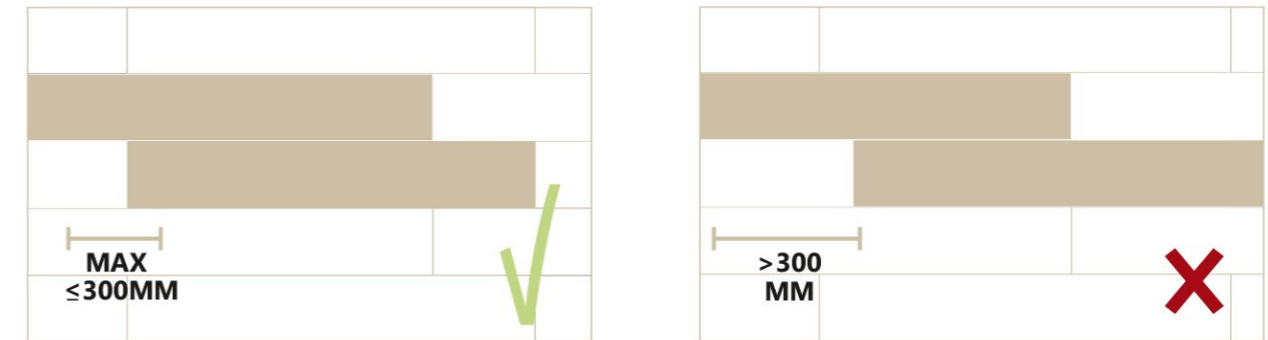

The longest side should be staggered no more than 300mm when laid in running bond.

## V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

## PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

## FEATURES



**INDiART**

CERAMIC